
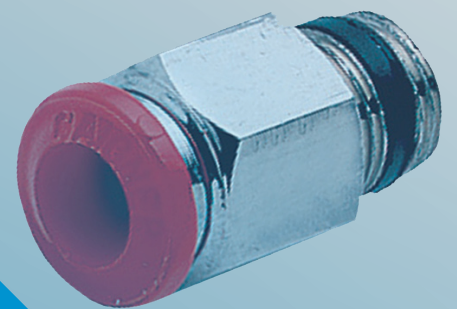


TEESING

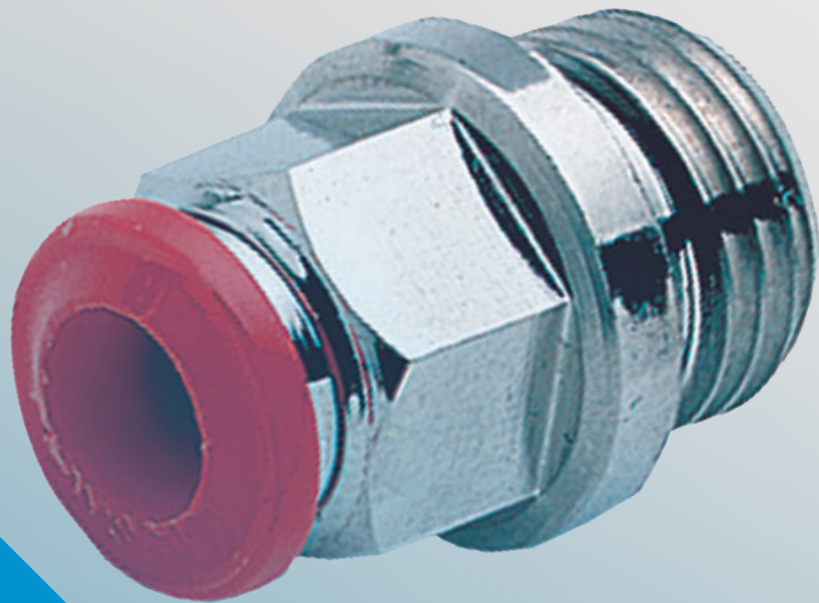

PUSH-IN CONNECTORS
BRASS NICKEL PLATED

WWW.TEESING.TW

PUSH-IN CONNECTORS BRASS NICKEL PLATED

• INDEX	2
• TECHNICAL INFORMATION	3
• STRAIGHT MALE CONNECTOR	4 - 5
• STRAIGHT FEMALE CONNECTOR	6
• STRAIGHT CONNECTOR	6
• ELBOW CONNECTOR	7
• TEE CONNECTOR	7
• Y CONNECTOR	7
• ELBOW MALE CONNECTOR	8 - 9
• TEE MALE CONNECTOR	10 - 11
• STRAIGHT MALE CONNECTOR	12
• BULKHEAD FITTING	12
• BANJO RING	13
• BANJO CONNECTOR	14 - 15
• PLUG	15

TECHNICAL INFORMATION

MATERIALS

- 1 Nickel-plated brass Body
- 2 Acetalic resin Collet
- 3 Nickel-plated brass Capsule
- 4 Steel aisi 301 Clamping washer
- 5 Technopolymeric Safety ring
- 6 NBR Lip seal
- 7 NBR Thread packing

CONNECTION TUBES

Plastic tubes:

PA6 - PA11 - PA 12 - Polyethylene - *Polyurethane - PTFE - FEP - ecc.

*For Polyurethane hoses it is required a minimum hardness of 98 shore

THREADS

"Short" tapered thread

Tapered gas in conformity with ISO 7.1 - BS 21 - DIN 2999

Parallel gas in conformity with ISO 228 Classe A

Metric in conformity with ISO R/262

PRESSURES

Minimum pressure: -0.99 bar [-0.099 Mpa]

Maximum pressure: 15 bar [1.5 Mpa]

FLUID COMPATIBILITY


Compressed air

Vacuum

MEASURE

Tubes: from 3 to 14

Thread: from M3 to 1/2

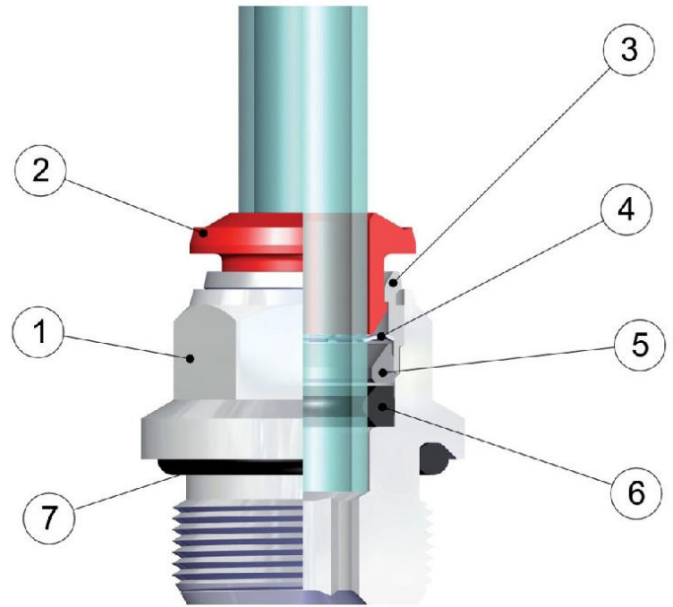






PUSH-IN CONNECTORS

BRASS NICKEL PLATED






STRAIGHT MALE CONNECTOR

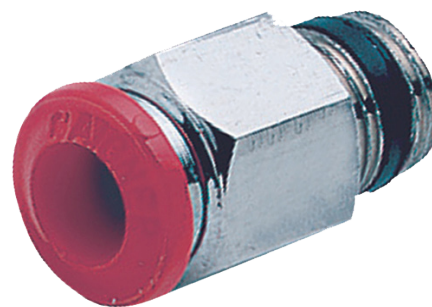MALE CONNECTOR MALE PUSH-IN / BSPT
BRASS NICKEL PLATED

				
34000010	4	1/8"	10	19
34000020	6	1/8"	13	22.5
34000030	6	1/4"	14	24.5
34000040	8	1/8"	14	25.5
34000050	8	1/4"	14	25
34000060	8	3/8"	17	25
34000070	10	1/4"	17	31
34000080	10	3/8"	17	28.5
34000090	12	1/4"	20	36
34000100	12	3/8"	20	33.5



MALE CONNECTOR MALE PUSH-IN / BSPT
BRASS NICKEL PLATED WITH INNER HEXAGON SOCKET


					
34000110	3	M5	2	19	8
34000120	4	M5	2	21	10
34000130	4	1/8"	3	19	10
34000140	6	M5	2	24.5	12
34000150	6	1/8"	4	22.5	12
34000160	6	1/4"	4	24.5	14
34000170	8	1/8"	5	25.5	14
34000180	8	1/4"	6	25	14



STRAIGHT MALE CONNECTOR

MALE CONNECTOR WITH O-RING MALE PUSH-IN / BSP
BRASS NICKEL PLATED

				
34000190	3	M5	8	19
34000200	4	M5	10	21
34000300	4	1/8"	10	20
34000310	4	1/4"	16	19.5
34000320	6	M5	13	24.5
34000330	6	1/8"	13	23.5
34000340	6	1/4"	13	23.5
34000350	8	1/8"	14	25
34000360	8	1/4"	14	23
34000370	8	3/8"	14	24
34000380	10	1/4"	17	30.5
34000390	10	3/8"	17	27.5
34000400	12	3/8"	20	34
34000410	12	1/2"	22	31
34000420	14	3/8"	21	35
34000430	14	1/2"	22	32

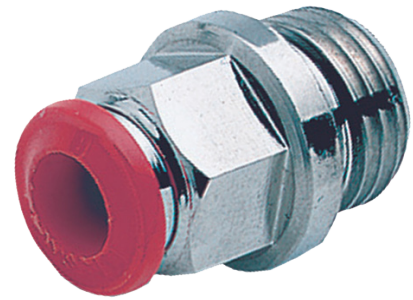






PUSH-IN CONNECTORS

BRASS NICKEL PLATED

STRAIGHT FEMALE CONNECTOR




FEMALE CONNECTOR FEMALE PUSH-IN / BSP
BRASS NICKEL PLATED

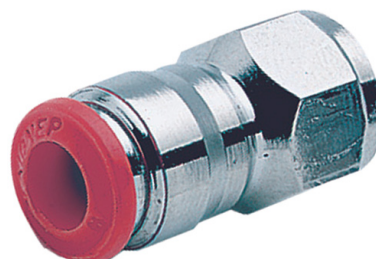				
34000670	3	M5	9	18.5
34000680	4	1/8"	13	24
34000690	6	1/8"	13	26
34000700	6	1/4"	16	29.5
34000800	8	1/8"	15	27
34000810	8	1/4"	17	29.5






STRAIGHT CONNECTOR

UNION CONNECTOR PUSH-IN
BRASS NICKEL PLATED

			
34000820	3	27	8
34000830	4	30	11.5
34000840	6	34	12.5
34000850	8	36	14.7.5
34000860	10	42	17.5
34000870	12	47	20.5
34000880	14	49	21.5





UNION CONNECTOR PUSH-IN
BRASS NICKEL PLATED

			
34001000	6 - 4	32	12.5
34001010	8 - 6	35	14.5

ELBOW CONNECTOR




UNION ELBOW CONNECTOR PUSH-IN
BRASS NICKEL PLATED

		
34000600	3	9
34000610	4	9
34000620	6	11
34000630	8	13
34000640	10	16
34000650	12	19
34000660	14	19



TEE CONNECTOR





UNION TEE CONNECTOR PUSH-IN
BRASS NICKEL PLATED

			
34001020	3	9	34
34001030	4	9	34
34001040	6	11	42
34001050	8	13	45
34001060	10	16	53
34001070	12	19	61
34001080	14	19	65



Y CONNECTOR

UNION Y CONNECTOR PUSH-IN BRASS NICKEL PLATED

				
34001090	3	9	29	20
34001100	4	9	32	22
34001110	6	11	36	26
34001120	8	15	41	30








PUSH-IN CONNECTORS

BRASS NICKEL PLATED


ELBOW MALE CONNECTOR


SWIVELLING ELBOW CONNECTOR MALE WITH O-RING
MALE PUSH-IN / BSP BRASS NICKEL PLATED

	 \varnothing mm			 H mm	 B mm
34001670	3	M5	8	21	26
34001680	4	M5	8	20	24
34001690	4	1/8"	13	24	27
34001700	4	1/4"	16	29	34
34001710	6	M5	8	27	29
34001720	6	1/8"	13	28	31
34001730	6	1/4"	16	29	34
34001740	8	1/8"	13	30	35
34001750	8	1/4"	16	31	36
34001760	8	3/8"	18	34	38
34001900	8	1/2"	22	35	40
34001910	10	1/4"	16	35	40
34001920	10	3/8"	18	36	42
34001930	10	1/2"	22	39	43
34001940	12	3/8"	18	31	46
34001950	12	1/2"	22	44	48
34001960	14	3/8"	18	44	48
34001970	14	1/2"	22	44	48






SWIVELLING ELBOW CONNECTOR MALE WITH O-RING
MALE PUSH-IN / BSPT BRASS NICKEL PLATED

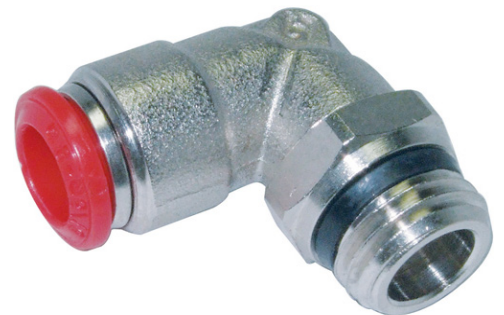	 \varnothing mm			 H mm	 B mm
34001980	4	1/8"	12	23	27
34001990	6	1/8"	12	29	31
34002100	6	1/4"	14	29	30
34002110	8	1/8"	12	29	33
34002120	8	1/4"	14	30	38
34002130	8	3/8"	17	32	40
34002140	8	1/2"	22	32	40
34002150	10	1/4"	14	36	42
34002160	10	3/8"	17	36	43
34002170	10	1/2"	22	38	46
34002180	12	3/8"	17	40	46
34002190	12	1/2"	22	41	46
34002200	14	3/8"	17	37.5	46
34002210	14	1/2"	22	42.5	46




ELBOW MALE CONNECTOR

ELBOW CONNECTOR MALE
MALE PUSH-IN / BSPT BRASS NICKEL PLATED

					
	mm			mm	mm
34002220	4	M5	9	22	20
34002230	4	1/8"	9	21	20
34002240	6	1/8"	11	28	24
34002250	6	1/4"	11	29	24
34002260	8	1/8"	13	29	26
34002400	8	1/4"	13	29	29
34002410	10	1/4"	16	26	33
34002420	10	3/8"	16	25	33
34002430	12	1/4"	19	40	38
34002440	12	3/8"	19	43	38




SWIVELLING EXTENDED ELBOW CONNECTOR MALE
MALE PUSH-IN / BSPT BRASS NICKEL PLATED

					
	mm			mm	mm
34002450	4	1/8"	13	34	17
34002460	4	1/4"	16	34	17
34002470	6	1/8"	16	39	21
34002480	6	1/4"	16	47	21
34002490	8	1/8"	13	40,5	22,5
34002500	8	1/4"	16	48	22,5
34002510	8	3/8"	18	49,5	22,5
34002600	10	1/4"	16	50	26,5
34002610	10	3/8"	18	51,5	26,5



SWIVELLING EXTENDED ELBOW CONNECTOR WITH
O-RING MALE - MALE PUSH-IN / BSP
BRASS NICKEL PLATED

					
	mm			mm	mm
34002620	4	1/8"	13	37,5	17
34002630	4	1/4"	16	37,5	17
34002640	6	1/8"	16	39,5	21
34002650	6	1/4"	16	46	21
34002660	8	1/8"	13	41	22,5
34002670	8	1/4"	16	47	22,5
34002680	8	3/8"	18	49,5	22,5
34002690	10	1/4"	16	49	26,5
34002700	10	3/8"	18	51,5	26,5

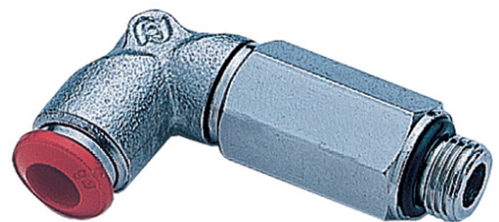






PUSH-IN CONNECTORS

BRASS NICKEL PLATED





TEE MALE CONNECTOR

SWIVELLING TEE CONNECTOR MALE WITH O-RING
MALE PUSH-IN / BSP BRASS NICKEL PLATED

					
34001130	3	M5	8	34	20
34001140	4	M5	8	34	25
34001150	4	1/8"	13	34	27
34001160	6	M5	8	42	29
34001170	6	1/8"	13	42	30
34001180	6	1/4"	16	42	34
34001300	8	1/8"	13	45	32
34001310	8	1/4"	16	45	36
34001320	10	1/4"	16	53	40
34001330	10	3/8"	18	53	42
34001340	10	1/2"	22	53	42
34001350	12	3/8"	18	61	51
34001360	12	1/2"	22	61	51
34001370	14	3/8"	17	65	51
34001380	14	1/2"	22	65	51






SWIVELLING LATERAL TEE CONNECTOR MALE WITH O-RING
MALE PUSH-IN / BSP BRASS NICKEL PLATED

				
34002710	3	M5	8	37
34002720	4	M5	8	37
34002730	4	1/8"	13	39
34002740	6	M5	8	44
34002750	6	1/8"	13	46
34002760	6	1/4"	16	49
34002770	8	1/8"	13	49
34002780	8	1/4"	16	52
34002900	10	1/4"	16	57
34002910	10	3/8"	18	59
34002920	10	1/2"	22	60
34002930	12	3/8"	18	67
34002940	12	1/2"	22	67



TEE MALE CONNECTOR

SWIVELLING TEE CONNECTOR MALE MALE PUSH-IN / BSPT BRASS NICKEL PLATED

					
	mm			mm	mm
34001390	4	1/8"	13	34	27
34001400	4	1/4"	15	34	27
34001410	6	1/8"	13	42	30
34001420	6	1/4"	15	42	36
34001430	8	1/8"	13	45	32
34001450	8	1/4"	15	45	37
34001600	10	1/4"	15	53	43
34001610	10	3/8"	17	53	44
34001620	10	1/2"	22	53	51
34001630	12	3/8"	17	61	55
34001640	12	1/2"	22	61	59
34001650	14	3/8"	17	61	55
34001660	14	1/2"	22	61	59



TEE CONNECTOR MALE MALE PUSH-IN / BSPT BRASS NICKEL PLATED

					
	mm			mm	mm
34002950	4	M5	9	34	20
34002960	4	1/8"	9	34	20
34002970	6	1/8"	11	42	23
34002980	8	1/8"	13	45	26
34003100	8	1/4"	13	45	28
34003110	10	1/4"	16	53	34
34003120	10	3/8"	16	53	33
34003130	12	1/4"	19	61	37
34003140	12	3/8"	19	61	40








PUSH-IN CONNECTORS

BRASS NICKEL PLATED





STRAIGHT MALE CONNECTOR

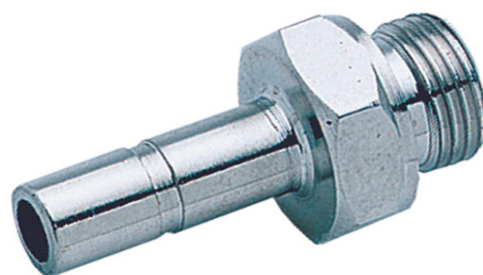
ADJUSTABLE MALE ADAPTOR
MALE PUSH-IN /BSP BRASS NICKEL-PLATED

				
34004500	4	M5	8	25
34004510	4	1/8"	13	26.5
34004520	6	M5	8	27
34004530	6	1/8"	13	28.5
34004540	6	1/4"	16	31
34004550	8	1/8"	13	29.5
34004700	8	1/4"	16	32
34004710	8	3/8"	20	33.5
34004720	10	1/4"	16	36
34004730	10	3/8"	20	37.5
34004900	12	1/4"	16	28.5
34004910	12	3/8"	20	40






UNION REDUCTION CONNECTOR
STEM PUSH-IN BRASS NICKEL PLATED

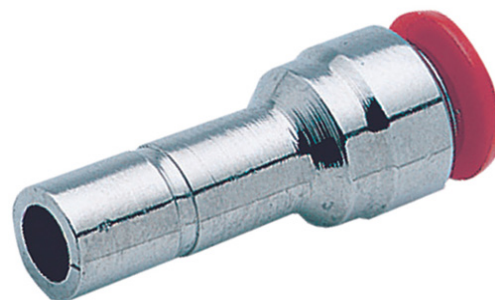
				
34004920	4	3	27	8
34004930	6	4	30	10
34004940	8	6	34	12
34004950	10	8	38	14
34005100	12	8	39	14



BULKHEAD FITTING


UNION BULKHEAD CONNECTOR PUSH-IN BRASS
NICKEL PLATED


				
34003150	3	M10 x 1	14	27
34003160	4	M12 x 1	17	31.5
34003170	6	M14 x 1	17	35
34003180	8	M16 x 1	19	37
34003190	10	M20 x 1	24	43
34003200	12	M22 x 1	26	48

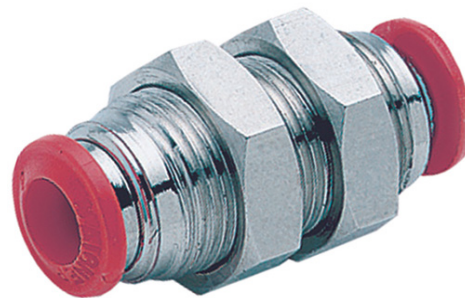






BANJO RING

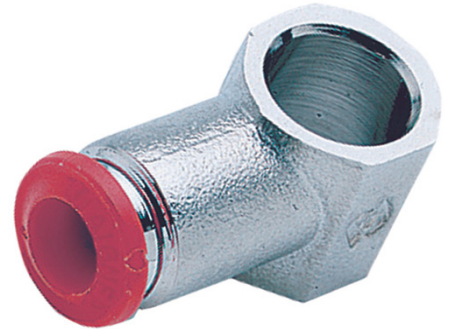BANJO RING PUSH-IN BRASS NICKEL-PLATED

					
	mm			mm	mm
34003750	3	M5	-	-	12
34003760	4	M5	-	-	12
34003770	4	1/8"	14	27	15
34003900	6	M5	18	25	12
34003910	6	1/8"	14	30	15
34003920	6	1/4"	18	35	16
34003930	8	1/8"	14	30	16
34003940	8	1/4"	18	35	16
34003950	8	3/8"	21	30	20
34003960	10	1/4"	18	35	20
34003970	10	3/8"	21	42	20
34003980	12	3/8"	21	52	20
34004100	12	1/2"	25	52	20
34004110	14	1/2"	25	52	20



BANJO RING DOUBLE PUSH-IN BRASS NICKEL-PLATED

					
	mm			mm	mm
34004120	4	M5	-	38	12.5
34004130	4	1/8"	14	42	15
34004140	6	1/8"	14	45	15
34004150	6	1/4"	18	50	16
34004160	8	1/8"	14	48	15
34004170	8	1/4"	18	52	16








PUSH-IN CONNECTORS

BRASS NICKEL PLATED


BANJOCONNECTOR

SWIVELLING SINGLE BANJO MALE CONNECTOR WITH O-RING PUSH-IN / BSP BRASS NICKEL PLATED

					
34003210	3	M5	5	23.5	24.5
34003220	4	M5	5	23.5	24.5
34003230	4	1/8"	5	28	27
34003240	6	M5	5	25	24.5
34003250	6	1/8"	5	29.5	27
34003260	6	1/4"	6	34	30
34003270	8	1/8"	5	31	27
34003280	8	1/4"	6	35	30
34003400	8	3/8"	7	38.5	35.5
34003410	10	1/4"	6	38	34
34003420	10	3/8"	7	41	35.5
34003430	12	3/8"	7	43	35.5




SINGLE BANJO MALE CONNECTOR PUSH-IN / BSP BRASS NICKEL PLATED

					
34003440	4	M5	8	21	22
34003450	4	1/8"	14	23	27
34003460	6	M5	8	21	27
34003470	6	1/8"	14	25.5	27
34003480	6	1/4"	17	27	29.5
34003600	8	1/8"	14	26	27
34003610	8	1/8"	17	28	29.5
34003620	8	3/8"	19	30	34.5
34003630	10	1/4"	17	31	33.5
34003640	10	3/8"	19	32.5	34.5
34003650	12	3/8"	19	34.5	34.5







BANJOCONNECTOR


DOUBLE BANJO MALE CONNECTOR PUSH-IN / BSP
BRASS NICKEL PLATED

					
34003660	4	1/8"	14	43	23
34003670	6	1/8"	14	43	24.5
34003680	6	1/4"	17	46	27
34003690	8	1/8"	14	43	26
34003700	8	1/4"	17	46	28
34003710	8	3/8"	19	59.5	30
34003720	10	1/4"	17	58.5	31
34003730	10	3/8"	19	59.5	32.5
34003740	12	6/8"	19	59.5	34.5




SWIVELLING DOUBLE BANJO MALE CONNECTOR WITH
O-RING PUSH-IN / BSP BRASS NICKEL PLATED

					
34004180	4	M5	5	38	24.5
34004300	4	1/8"	5	42	27
34004310	6	1/8"	5	45	27
34004320	6	1/4"	6	50	30
34004330	8	1/8"	5	48	27
34004340	8	1/4"	6	52	30

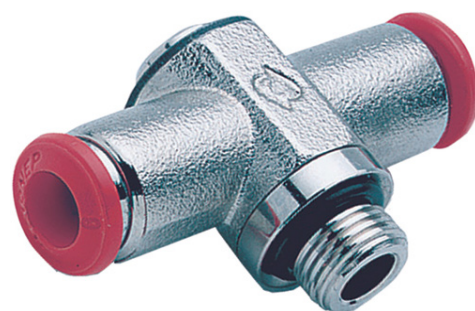

PLUG

PLUG PUSH-IN PLASTIC RED

			
34005110	3	18	7
34005120	4	23	7
34005130	6	24	10
34005200	8	26	13
34005210	10	28	17
34005220	12	30	20

